


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Index File No. C-5

Corner was originally established by W. B. Barr, under G. L. O. contract No. 388, in September, 1881. Surveyors General's notes state: "Marked basalt rock 12 X 12 X 4 for 1/4 Sec. corner, from which, a pine 12 ins. diam. brs. West 17 lks. dist. A pine 8 ins. diam. brs. S20°E, 35 lks. dist."

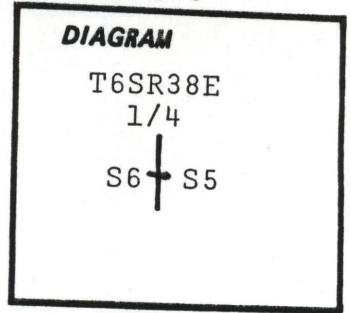

Description of corner evidence found:

Found 12 X 9 X 3 inch stone clearly marked 1/4 in small mound of stone. From which a grown over 16" pine bears West 11.2 ft. and 22" stump bears S20°E, 23.0 ft. West BT has BT tag.

Description of monument and accessories | established to perpetuate the original location of this corner:

At center of above described point, set 2 1/2" X 30" galvanized pipe and brass cap marked:	T6SR38E
Set pipe 25" in the ground and mound of stone around to cap. Placed marked stone at base of pipe.	1/4
From which, by magnetic declination of N20°E:	S6 + S5
A 12" pine bears S21°E, 31.9 ft. scribed 1/4S5 BT. An 11" pine bears S61°W, 25.6 ft. scribed 1/4S6 BT. Painted blazes red and 6" red band around. Placed 54-3s and brass washer stamped PLS 1051 on BTs. Placed 54-4 on steel fence post 5' South of corner.	OR PLS 1051 1979

Thereby certify that the above corner monument was reestablished as herein described.

Witnesses: David L. Landers
Robert S. Stevens

July 19, 1979

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>Barry B. Barbour</i>
OREGON OCT. 17, 1975 BARRY B. BARBOUR 1051

Office of.....County.....Surveyor..... County of.....Union.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 6th day of December 1979

J. Landers (COUNTY OFFICIAL) by *D. L. Landers* (DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____
File No. <u>759-84 R</u>