


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not Set.

Index File No. F-3

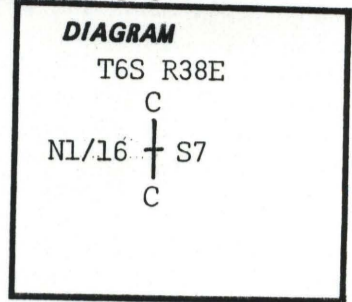

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At surveyed point set 2 1/2" X 30" galvanized pipe and brass cap marked:  
 Set pipe 24" in the ground and mound of stone around to cap.  
 From which by magnetic declination of N20°E:  
 An 11" Pine, bears N33°E, 21.1 ft. scribed CN 1/16 S7 BT.  
 A 14" Pine, bears S67°W, 41.5 ft. scribed CN 1/16 S7 BT.  
 Painted blazes red and 6" red band around. Placed 54-3s and brass washers stamped PLS 1051. Placed 54-9 and Crown Zellerbach property sign on a steel fence post 5' south and a property sign on a steel fence post 5' east of the corner.

T6S R38E  
 C  
 NL/16 + S7  
 C  
 OR PLS 1051  
 1981

I hereby certify that the above corner monument was established as herein described.

Witnesses: Daniel Rowland  
Douglas Moser  
Beverly Weaselhead

May 12, 1981

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Barry B. Barbour*

OREGON  
OCT. 17, 1975  
BARRY B. BARBOUR  
1051

Office of..... County Surveyor..... County of..... Union.....

State of..... Oregon..... I hereby certify that the within instrument was filed in this office for record on the..... day of..... June....., 1981.

HOWARD L. PERRY..... by *Mary J. Langley*.....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received 798-276

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 775-84R