


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. F-4

History of original corner establishment:

Not Set.

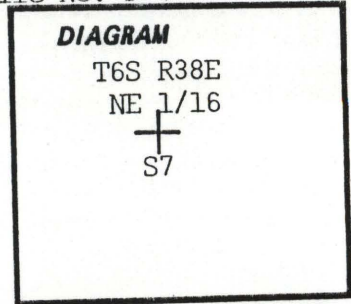

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At surveyed point set 2 1/2" X 30" galvanized pipe and brass cap marked:
Set pipe 24" in the ground and mound of stone around to cap.
From which by magnetic declination of N20°E:
A 14" Tamarac, bears N54°E, 50.5 ft. scribed NE 1/16 S7 BT.
An 18" Pine, bears N78°W, 30.3 ft. scribed NE 1/16 S7 BT.
Painted blazes red and 6" red band around. Placed 54-3s and brass washers stamped PLS 1051 on the BTs. Placed Crown Zellerbach property tag and 54-9 on a steel fence post 5' West of the corner.

T6S R38E
NE 1/16
+
S7
OR PLS 1051
1981

I hereby certify that the above corner monument was established as herein described.

Witnesses: Daniel Rowland
Douglas Moser
Beverly Weaselhead

May 12, 1981

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Barry B. Barbour

OREGON
OCT. 17, 1975
BARRY B. BARBOUR
1051

Office of.....County Surveyor..... County of.....Union.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 26 day of June....., 1981
HOWARD L. PERRY..... by *Barry B. Barbour*
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received ☆ GPO-798-276 _____

Date Filed _____

By _____

File No. 776-84R