


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David Thompson under GLO contract Number 103, dated September, 1863. Surveyor General record states:

Set post in mound of earth with charred stake, pits, trenches, as per instructions.

No record of subsequent monumentation found in Union County survey records

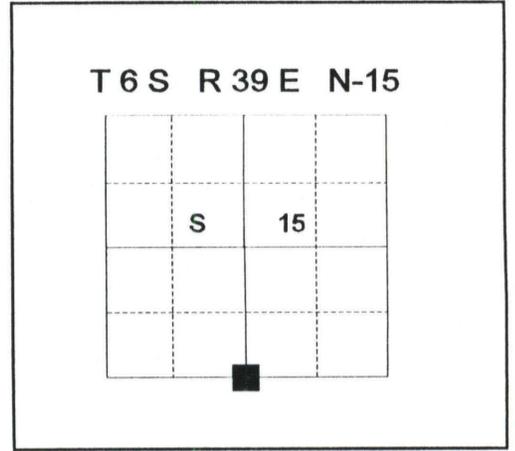

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner.

See Union County survey 023-1995.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the intersection of east, west and north fences, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which;

NEW BEARING OBJECTS:


- A 5/8"x30" rebar with aluminum cap bears North, 18.58 feet marked BGB N RP
- A 5/8"x30" rebar with aluminum cap bears East, 16.70 feet marked BGB E RP
- A 5/8"x30" rebar with aluminum cap (buried 1.0 feet) bears South, 5.70 feet marked BGB S RP
- A 5/8"x30" rebar with aluminum cap bears West, 10.87 feet marked BGB W RP

I hereby certify that the corner was monumented on July 17, 1995.

Witness: Travis Foster
Pete Crabtree

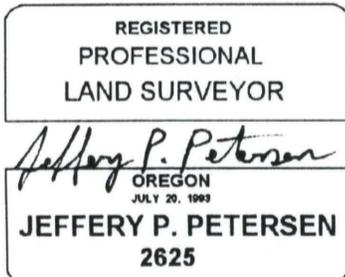

Renewal Date: December, 31 1996

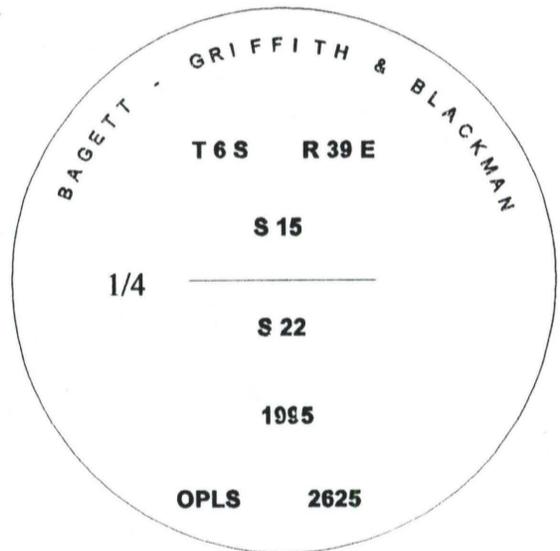

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination, the distances are to the center of the aluminum cap.

UNION COUNTY SURVEYOR

Date Received 7-24-95

Date Filed 7-26-95

Filed By Gregory T. Clark

File Number 011-1995 R

**HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200146

QUARTER COMMON TO: 15 & 22

TWP. 6 S. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 28 MARCH 2001

LAT: 45 ° 2 ' 7.81097 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 55 ' 19.39470 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 509668.901 INT FT.

E: 8868379.185 INT FT.

TYPE: GPS

THETA: 1 ° 49 ' 41.6755058 "



ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998972744

ELEV: 3277.62 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

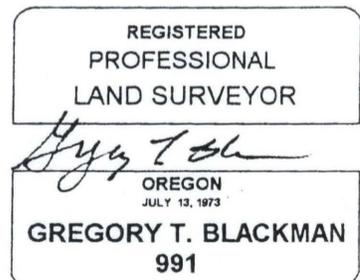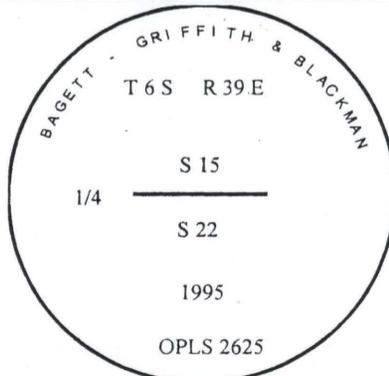

Renewal Date: Dec. 31, 2001

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)