

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Page 142 of the Old Book of Surveys states: Set post for 1/8 corner.

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner.

See Union County survey 023-1995.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which;


NEW BEARING OBJECTS:

- A 5/8"x30" rebar with 1.5" aluminum cap bears N37°E, 17.85 feet marked BGB NE RP
- A 5/8"x30" rebar with 1.5" aluminum cap bears S34°E, 19.80 feet marked BGB SE RP

Set steel fence post 1 foot west.

I hereby certify that the corner was monumented on July 17, 1995.

Witness: Travis Foster
Pete Crabtree

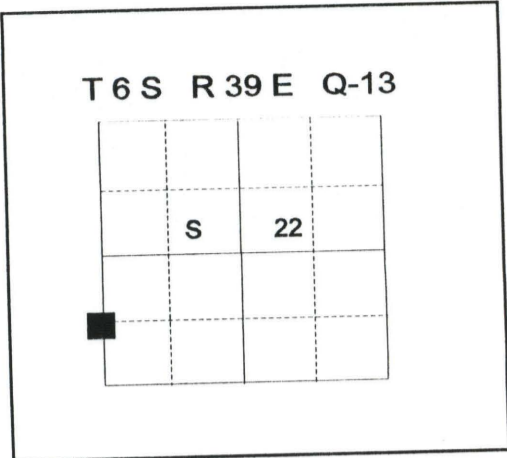


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1993

JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

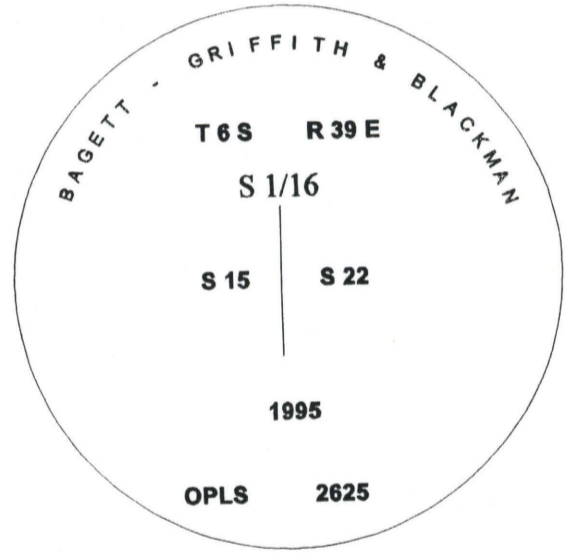

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination, the distances are to the center of the aluminum cap.

**UNION COUNTY
SURVEYOR**

Date Received 7-24-95

Date Filed 7-26-95

Filed By *Jeffery P. Petersen*

File Number 012-1995 R