


LAND CORNER RECORD

5680-2

1. T S R 41E No. A-13 Cor. Sec Mer. W State OK (Rectangular) N. F. W W Dist. UNION

2. Corner Status

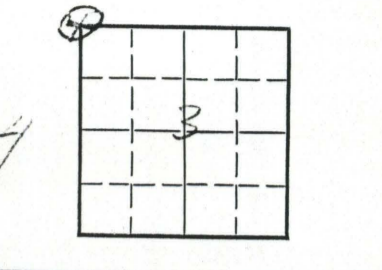

7. Photo Identification  
Photo No. FW-9-123  
Ident. By: PIX PUNCH

8. Plane Coordinate Position Data  
State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Etab. By \_\_\_\_\_  
Field Book No. \_\_\_\_\_  
Where Filed \_\_\_\_\_

9. Evaluation  
Authentic \_\_\_\_\_  
Needs Verif. \_\_\_\_\_ Monument \_\_\_\_\_  
Re-estab. \_\_\_\_\_ Survey \_\_\_\_\_  
Land Status \_\_\_\_\_

3. Original Description \_\_\_\_\_ Vol. \_\_\_\_\_ Page \_\_\_\_\_ Where Recorded \_\_\_\_\_

4. Description of Corners:

5. Investigation Notes: STONE MOUND  
28" PP DEAD AND DOWN WITH TSSR41E  
S-4-BT  
26" PP WITH - 65 R41E - S.3 BT,

6. Signed E. A. Holland Title \_\_\_\_\_ Date 11/2/66

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed 12-23-87


By G. LANGLISE, DEPUTY

File No. 378-87R

A-13

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

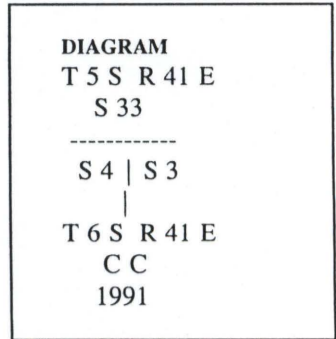

BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

13.425 From this point, the original closing cor. of sec. 3 and 4, T6S R41 E, bears North, 0.460 chs dist., monumented with the original basalt stone, 17 x 14 x 4 ins., loosely set at the center of a stone mound with no marks, from which the remains of the original bearing trees:

- A root hole, bears N.57°E., 70 lks. dist. with pine log, 30 ins. diam., alongside, with scribe mark S on upper blaze and BT on lower blaze.
- A ponderosa pine, 33 ins. diam., bears S.85°E., 74 lks. dist. with scribe marks 41 E S33 on upper blaze and BT on lower, partially healed blaze. (Record, S.82°E.)
- A root hole, bears S.29°W., 90 lks. dist. with pine log alongside, 25 ins. diam., with scribe marks TRS visible on upper blaze and BT on lower blaze.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, in a mound of stone, 3 ft. base, to top, with brass cap, from which:

- A lodgepole pine, 9 ins. diam., bears S.51°E., 11 lks. dist. mkd. T6S R41E S3 CC BT.
- A ponderosa pine, 13 ins. diam., bears S.16¼°W., 56 lks. dist. mkd. T6S R41E S4 CC BT.

Deposit a white "DEEP-1" magnetic marker at the base the corner stone alongside, and set a 6 ft. steel fence post alongside the stainless steel post.

**Description of corner evidence found:**


Found a 3" BLM brass capped pipe, cap marked per diagram, 12" above the ground in mound of stone to cap with T post 1'± NW of cor., from which:

- A pine, 8" diam., bears S.51°10'E., 6.91', with a 19" x 3" blaze, (not legible).
- A ponderosa pine, 9" diam., bears S.15°00'W., 37.53', with a 25" x 3" blaze, (not legible).
- A ponderosa pine, 32" diam., bears S.85°00'E., 48.73', with a 2' blaze (not legible).

**Description of monument and accessories I established to perpetuate the original location of this corner:**


A ponderosa pine, 12" diam., bears N.50°18'E., 28.34', with 6" x 3" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
 WITNESS TO MONUMENT: DAVID SUTHERLAND  
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR <hr/> Date Received <u>10/28/98</u> Date Filed <u>10/31/98</u> <hr/> Office of _____ County of _____ State of _____ by <u>R. Robinson, Deputy</u> for record on the <u>11</u> day of <u>1998</u> , 19____ by _____ (COUNTY OFFICIAL) (DEPUTY)	REGISTERED PROFESSIONAL LAND SURVEYOR <hr/>  OREGON JULY 15, 1993 RONALD E. STOLL 2058
---	--

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

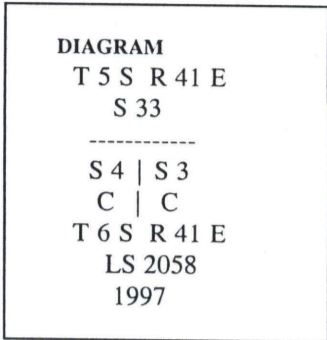

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped monument, cap marked per diagram, 22" in the ground, with a mound of stone to cap, from which:

- A pine, 11" in diam., bears S.63°W., 11.3', with partial visible scribing
- A pine, 10" in diam., bears N.11°20'W., 27.1', with partial visible scribing
- A pine, 28" in diam., bears N.61°00'E., 55.8', with partial visible scribing
- A pine, 11" in diam., bears N.23°50'E., 53.7', with partial visible scribing

A 3" BLM brass capped pipe, marked CC, 12 " above the ground bears N 00°05'53" W, 30.53'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: ERIC GREEN  
BEARINGS AND DISTANCES TAKEN TO THE CENTER OF CAP.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR
Date Received <u>10/28/98</u>
Date Filed <u>10/31/98</u>
By <u>R. ROBINSON, DEPUTY</u>
File No. <u>178-1998R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<u>MA Stoll 9/98</u>
OREGON JULY 15, 1983 RONALD E. STOLL 2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

A-13.5

**History of original corner establishment:**

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

13.425 From this point, the original closing cor. of sec. 3 and 4, T6S R41 E, bears North, 0.460 chs dist., monumented with the original basalt stone, 17 x 14 x 4 ins., loosely set at the center of a stone mound with no marks, from which the remains of the original bearing trees:

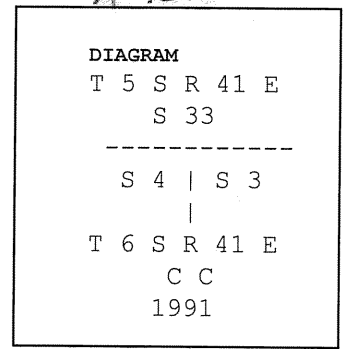

A root hole, bears N.57°E., 70 lks. dist. with pine log, 30 ins. diam., alongside, with scribe mark S on upper blaze and BT on lower blaze.

A ponderosa pine, 33 ins. diam., bears S.85°E., 74 lks. dist. with scribe marks 41 E S3 on upper blaze and BT on lower, partially healed blaze. (Record, S.82°E.)

A root hole, bears S.29°W., 90 lks. dist. with pine log alongside, 25 ins. diam., with scribe marks T6S visible on upper blaze and BT on lower blaze.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, in a mound of stone, 3 ft. base, to top, with brass cap, from which:

A lodgepole pine, 9 ins. diam., bears S.51°E., 11 lks. dist. mkd. T6S R41E S3 CC BT.

A ponderosa pine, 13 ins. diam., bears S.16¼°W., 56 lks. dist. mkd. T6S R41E S4 CC BT.

Deposit a white "DEEP-1" magnetic marker at the base the corner stone alongside, and set a 6 ft. steel fence post alongside the stainless steel post.

**Description of corner evidence found:**

Found a 3" BLM brass cap, in mound of stone to cap with T post 1'± NW of cor., from which:

A lodgepole pine, 8" diam., bears S.51°10'E., 6.91', with a 19" x 3" blaze, (not legible).

A ponderosa pine, 9" diam., bears S.15°00'W., 37.53', with a 25" x 3" blaze, (not legible).

A ponderosa pine, 32" diam., bears S.85°00'E., 48.73', with a 2' blaze (not legible).

**Description of monument and accessories I established to perpetuate the original location of this corner:**

A ponderosa pine, 12" diam., bears N.50°18'E., 28.34', with 6" x 3" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY

WITNESS TO MONUMENT: DAVID SUTHERLAND

BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG

ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.

BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

**UNION COUNTY SURVEYOR**

Date Received 1-4-2006

Date Filed 9/19/2006

By R. ROBINSON, Deputy

File No. 002-2006R

REGISTERED PROFESSIONAL LAND SURVEYOR

*Handwritten signature: Ronald E. Stoll*

OREGON  
JULY 16, 1993  
RONALD E. STOLL  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_ day of \_\_\_\_\_, 20\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of the South Boundary  
 (First Standard Parallel South),  
 T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS													
	<p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p> <hr/> <p>S. 89° 34' 30" W., on the S. bdy. of sec. 33.</p> <p>Ascend over SE. slope.</p>												
13.425	<p>From this point, the original closing cor. of secs. 3 and 4, T. 6 S., R. 41 E., bears North, 0.460 chs. dist., monumented with the original basalt stone, 17 x 14 x 4 ins., loosely set at the center of a stone mound with no marks, from which the remains of the original bearing trees:</p> <ul style="list-style-type: none"> <li>A root hole, bears N. 57° E., 70 lks. dist., with pine log, 30 ins. diam., alongside, with scribe mark S on upper blaze and BT on lower blaze.</li> <li>A ponderosa pine, 33 ins. diam., bears S. 85° E., 74 lks. dist., with scribe marks 41E S3 on upper blaze and BT on lower, partially healed blaze. (Record, S. 82° E.)</li> <li>A root hole, bears S. 29° W., 90 lks. dist., with pine log alongside, 25 ins. diam., with scribe marks TRS visible on upper open blaze and BT on lower open blaze.</li> </ul> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 5 S</td><td>R 41 E</td></tr> <tr><td>S 33</td><td></td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td>T 6 S</td><td>R 41 E</td></tr> <tr><td>CC</td><td></td></tr> <tr><td>1991</td><td></td></tr> </table> </div> <p>from which new bearing trees</p> <ul style="list-style-type: none"> <li>A lodgepole pine, 9 ins. diam., bears S. 51° E., 11 lks. dist., mkd. T6S R41E S3 CC BT.</li> <li>A ponderosa pine, 13 ins. diam., bears S. 16¼° W., 56 lks. dist., mkd. T6S R41E S4 CC BT.</li> </ul> <p>Deposit a white "DEEP-1" magnetic marker at the base, the corner stone alongside, and set a 6 ft. steel fence post alongside the stainless steel post.</p> <p>Continue to ascend SE. slope.</p>	T 5 S	R 41 E	S 33		S 4	S 3	T 6 S	R 41 E	CC		1991	
T 5 S	R 41 E												
S 33													
S 4	S 3												
T 6 S	R 41 E												
CC													
1991													
14.50	<p>Top of ascent; along nearly level ridgetop.</p>												
19.930	<p><del>Point for the standard E 1/16 sec. cor. of sec. 33.</del></p> <p><del>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</del></p>												

UNION COUNTY SURVEYOR	
Date Received	3/5/13
Date Filed	3/5/13
By	<i>Pat Gillan</i>
File No.	186-201302