


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

10.705 Point for the closing cor. of secs. 1 and 2, T6S R41E, at proportionate distance; there is no remaining evidence of the original cor. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins in the ground, with brass cap, from which:

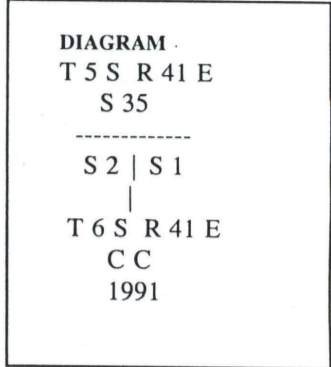

A larch, 14 ins. diam., bears S.12¼°E., 65 lks. dist. mkd. T6S R41E S1 CC BT.
 A ponderosa pine, 20 ins. diam., bears S.4½°W., 99 lks. dist. mkd. T6S R41E S2 CC BT.

Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.

From this point, the corner of wire fences, extending S. and W., bears N.25¼°E., 0.850 chs. dist.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, 5" above ground, no stone mound, from which:

A larch, 11" diam., bears S.12°02'E., 43.24', with a 19" x 3" blaze, scribed "T6S R41E S1 BT".
 A pine, 15" diam., bears S.04°19'W., 65.34', with a 24" x 5" blaze, (not legible).

Description of monument and accessories I established to perpetuate the original location of this corner:

A pine, 11" diam., bears N.58°25'W., 20.99', with a 10" x 4" blaze, scribed "BT".
 A pine, 9" diam., bears N.20°48'E., 48.27', with a 10" x 4" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
 WITNESS TO MONUMENT: DAVID SUTHERLAND
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR	
Date Received	<u>10/20/98</u>
Date Filed	<u>10/31/98</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>110-199BR</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>RMA Stoll 9/98</i>
OREGON JULY 15 1933 RONALD E. STOLL 2050

Office of _____ County of Union
 State of _____ I hereby certify that the within instrument was filed in this office
 for record on the ____ day of _____, 19____
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of the South Boundary
 (First Standard Parallel South),
 T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS																			
	Descend W. slope changing to NW. slope.																		
66.00	Along N. edge of road.																		
74.00	Spur, slopes NW., leave road; desc. W. slope.																		
79.300	Point for the standard cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.																		
	<table border="0"> <tr><td></td><td>SC</td><td></td></tr> <tr><td>T 5 S</td><td> </td><td>R 41 E</td></tr> <tr><td>S 35</td><td> </td><td>S 36</td></tr> <tr><td colspan="3" style="text-align: center;">1991</td></tr> </table>		SC		T 5 S		R 41 E	S 35		S 36	1991								
	SC																		
T 5 S		R 41 E																	
S 35		S 36																	
1991																			
	from which																		
	A ponderosa pine, 17 ins. diam., bears N. 13¾° E., 37 lks. dist., mkd. T5S R41E S36 SC BT.																		
	A ponderosa pine, 19 ins. diam., bears N. 30¾° W., 45 lks. dist., mkd. T5S R41E S35 SC BT.																		
	Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.																		
	N. 89° 42' 00" W., on the S. bdy. of sec. 35.																		
	Descend broken SW. slope.																		
5.50	Spur, slopes SW.; desc. NW. slope.																		
10.705	Point for the closing cor. of secs. 1 and 2, T. 6 S., R. 41 E., at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.																		
	<table border="0"> <tr><td>T 5 S</td><td> </td><td>R 41 E</td></tr> <tr><td>S 35</td><td> </td><td></td></tr> <tr><td>S 2</td><td> </td><td>S 1</td></tr> <tr><td>T 6 S</td><td> </td><td>R 41 E</td></tr> <tr><td colspan="3" style="text-align: center;">CC</td></tr> <tr><td colspan="3" style="text-align: center;">1991</td></tr> </table>	T 5 S		R 41 E	S 35			S 2		S 1	T 6 S		R 41 E	CC			1991		
T 5 S		R 41 E																	
S 35																			
S 2		S 1																	
T 6 S		R 41 E																	
CC																			
1991																			
	from which																		
	A larch, 14 ins. diam., bears S. 12¼° E., 65 lks. dist., mkd. T6S R41E S1 CC BT.																		
	A ponderosa pine, 20 ins. diam., bears S. 4¼° W., 99 lks. dist., mkd. T6S R41E S2 CC BT.																		
	Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.																		

UNION COUNTY
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By A. L. Edrington

File No. 187-2013R