


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.00 Set a basalt rock 18 x 16 x 5. 12 ins.in ground for 1/4 sec. cor. marked 1/4 on the W side from which:

- A pine, 24 ins. diam., bears N.60°W., 46 lks. dist. mkd. 1/4S BT.
- A pine, 16 ins. diam., bears S.85°E., 96 lks. dist. mkd. 1/4S BT.

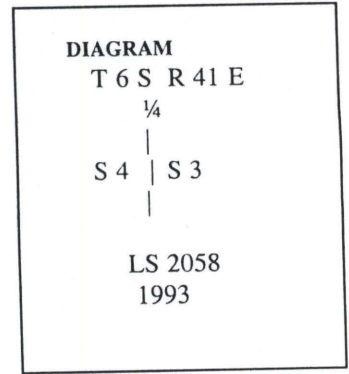

Description of corner evidence found:

No evidence of original monument found.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Ronald E. Stoll 9/98*

OREGON  
JULY 13, 1998  
RONALD E. STOLL  
2058

Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, with a mound of stone, from which:

- A fir, 18" diam., bears N.75°24'W., 57.85', scribed "1/4 S4 BT".
- A fir, 14" diam., bears S.45°15'W., 12.43', scribed "1/4 S4 BT".
- A fir, 12" diam., bears S.38°37'E., 17.94', scribed "1/4 S3 BT"...
- A fir, 18" diam., bears N.52°31'E., 6.10', scribed "1/4 S3 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
 WITNESS TO MONUMENT: DAVID SUTHERLAND  
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of \_\_\_\_\_ County of \_\_\_\_\_  
 State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
 for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
 SHERIFF  
 Date Received 10/28/98  
 Date Filed 10/31/98  
 By R. ROBINSON DEPUTY  
 File No. 119-1998R