


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

E-3

ORIGINALLY SURVEYED BY W. BARR JUNE 1885
CONTRACT #516

"SET A BASALT ROCK 19x14x4, 13" IN GROUND
MARKED ¼ ON NORTH SIDE"

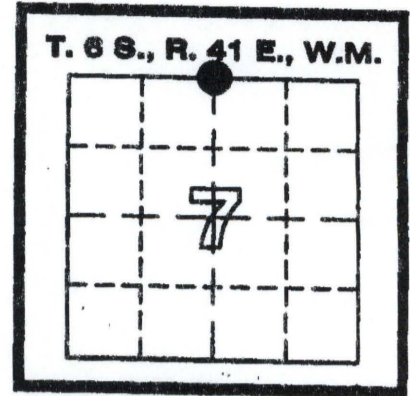

DIAGRAM

A PINE 9 INCHES IN DIAM BEARS N87E 129LKS DIST
A PINE 9 INCHES IN DIAM BEARS S13E 127LKS DIST

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

AT THE POSITION DETERMINED BY SURVEY I SET A 2 ½" ALUMINUM CAPPED ALUMINUM PIPE, 30 INCHES LONG, TOP OF PIPE IS 12" ABOVE GROUND SURROUNDED BY A MOUND OF STONE. A CARSONITE POST IS SET 1 FOOT NORTH OF MONUMENT.

FROM THE MONUMENT A 5/8" REBAR WITH YELLOW PLASTIC CAP MARKED "APA" BEARS:

- 1. N34°37'10"E 16.03 FEET
- 2. N44°22'17"W 18.41 FEET
- 3. S26°29'28"W 13.02 FEET
- 4. S74°44'40"E 26.32 FEET

I hereby certify that the above corner point was perpetuated as hereon described on

AUGUST 25, 2000
MICHAEL POSADA, OREGON PLS 02849

Witnesses: MIKE KIN KAID, SURVEY TECHNICIAN

O:\DOCS\FORMS\CERTCORNER.wpd

UNION COUNTY
SURVEYOR

Date Received 8/24/00

Date Filed 8/31/00

By [Signature]

File No. 020-2000R

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]

OREGON
JAN. 20, 1999
MICHAEL B. POSADA
02849

EXPIRES 12-31-00

DATED 08-25-00