

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

E-11

**History of original corner establishment:**

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.06 Set a basalt rock, 18 x 15 x 6. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on the N. side, from which:

- A tamarack, 9 ins. diam., bears N.20°E., 8 lks. dist. mkd. 1/4S BT.
- A tamarack, 7 ins. diam., bears S.12°E., 18 lks. dist. mkd. 1/4S BT.

**A Description of corner evidence found:**

Found a 2"x2" wood post 2' above the ground in 2' collar of stone.


A tamarack, 7" diam., bears S.08°0'E, 12.0', with partial visible scribing

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 19" in the ground with a 2' collar of stone, from which:

- Found a fir, 19" diam., bears S.02°32'E., 10.30', with a 12" blaze 3' above ground, set 14" blaze at base, scribed "1/4S9 BT".
- A white fir, 9" diam., bears N.28°26'E., 6.37', with a 14" blaze, scribed "1/4 S4 BT".
- A white fir, 8" diam., bears N.12°05'W., 21.61', with a 14" blaze, scribed "1/4 S4 BT".
- A white fir, 8" diam., bears N.70°25'W., 32.4, with a 14" blaze, scribed "1/4 S1 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
 WITNESS TO MONUMENT: DAVID SUTHERLAND  
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
 BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

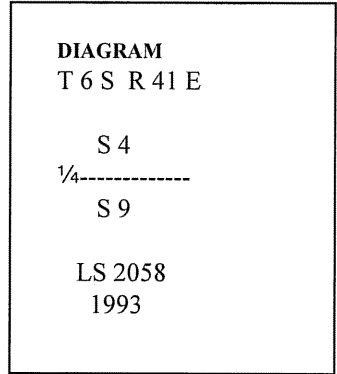

UNION COUNTY  
 SURVEYOR

---

Date Received 1/4/06

Date Filed 9/19/06

By R. Robinson, Deputy

File No. 006-2006P

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*M. J. Stoll 10/04*

OREGON  
 JULY 15, 1983  
 RONALD E. STOLL  
 2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
 State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
 for record on the \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

\_\_\_\_\_  
 (COUNTY OFFICIAL) By \_\_\_\_\_ (DEPUTY)

AF


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

41.66 Set a basalt rock, 18 x 15 x 6. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on the N. side, from which:

A tamarack, 9 ins. diam., bears N.20°E., 8 lks. dist. mkd. 1/4S BT.  
A tamarack, 7 ins. diam., bears S.12°E., 18 lks. dist. mkd. 1/4S BT.

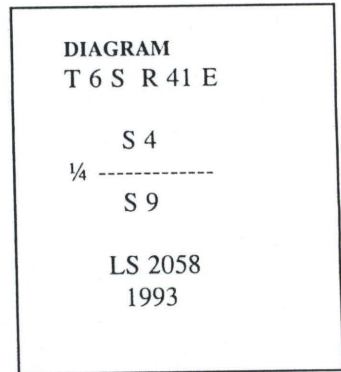

**A Description of corner evidence found:**

Found a 2"x2" wood post 2' above the ground in 2' collar of stone.

A douglas fir, 19" diam., bears S.02°32'E., 10.30', with a 12" blaze 3' above ground, set 14" blaze at base, scribed "1/4S9 BT".

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 19" in the ground with a 2' collar of stone, from which:

A white fir, 9" diam., bears N.28°26'E., 6.37', with a 14" blaze, scribed "1/4 S4 BT".  
A white fir, 8" diam., bears N.12°05'W., 21.61', with a 14" blaze, scribed "1/4 S4 BT".  
A white fir, 8" diam., bears N.70°25'W., 12.93', with a 14" blaze, scribed "1/4 S4 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY  
SURVEYOR

Date Received 10/28/98  
Date Filed 10/31/98  
By R. ROBINSON, DEPUTY  
File No. 138-1998R

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

M. Stoll 9/98

OREGON  
JULY 15, 1983  
RONALD E. STOLL  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

E-11

DIAGRAM  
T 6 S R 41 E

S 4  
¼-----  
S 9

LS 2058  
1993

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.06 Set a basalt rock, 18 x 15 x 6. 12 ins. in the ground for ¼ sec. cor. marked ¼ on the N. side, from which:

A tamarack, 9 ins. diam., bears N.20°E., 8 lks. dist. mkd. ¼S BT.  
A tamarack, 7 ins. diam., bears S.12°E., 18 lks. dist. mkd. ¼S BT.

A Description of corner evidence found:

Found a 2"x2" wood post 2' above the ground in 2' collar of stone.

A tamarack, 7" diam., bears S.08°0'E, 12.0', with partial visible scribing

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 ¼" aluminum capped pipe, cap marked per diagram, 19" in the ground with a 2' collar of stone, from which:

Found a fir, 19" diam., bears S.02°32'E., 10.30', with a 12" blaze 3' above ground, set 14" blaze at base, scribed "¼S9 BT".

A white fir, 9" diam., bears N.28°26'E., 6.37', with a 14" blaze, scribed "¼ S4 BT".

A white fir, 8" diam., bears N.12°05'W., 21.61', with a 14" blaze, scribed "¼ S4 BT".

A white fir, 8" diam., bears N.70°25'W., 32.4, with a 14" blaze, scribed "¼ S1 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY

WITNESS TO MONUMENT: DAVID SUTHERLAND

BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG

ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.

BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY  
SURVEYOR  
Date Received 1/4/06  
Date Filed 9/9/06  
By R. Robinson, Deputy  
File No. 006-2006P

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
M. Stoll 10/04  
OREGON  
JULY 15, 1983  
RONALD E. STOLL  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

\_\_\_\_\_  
(COUNTY OFFICIAL) By \_\_\_\_\_  
(DEPUTY)

AF