

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.00 Set stone 14 x 12 x 10 ins., for 1/4 sec. cor., from which:

A pine, 24 ins. diam., bears N.20°W., 135 lks. dist.


A pine, 14 ins. diam., bears S.48°E., 10 lks. dist.



Description of corner evidence found:

No evidence of original monument found.

Description of monument and accessories I established to perpetuate the original location of this corner:

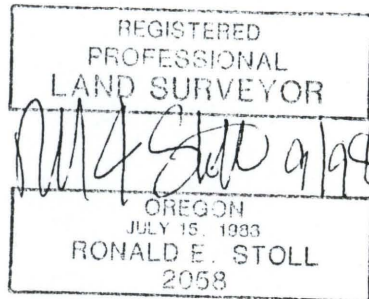

At a proportionate position, set a USFS 3/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, with a mound of stone to cap. from which:

A pine, 17" in diam., bears S.57°45'W., 18.7', scribed "1/4S12BT".

A pine, 14" in diam., bears N.18°10'W., 22.4', scribed "1/4S1BT".

A pine, 13" in diam., bears N.54°25'E., 32.4', scribed "1/4S1BT".

A pine, 20" in diam., bears S.84°40'W., 45.4', scribed "1/4S12BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY

WITNESS TO MONUMENT: ERIC GREEN

BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.

BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR
Date Received 10/28/98
Date Filed 10/31/98
By R. Robinson Deputy
File No. 127-1998R