


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

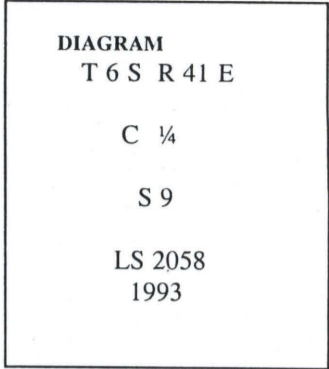

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald E. Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 26" in the ground with small mound of stone, from which:

- A lodgepole pine, 13" diam., bears S.28°41'E., 11.66', scribed "C¼ S9 BT".
- A lodgepole pine, 13" diam., bears S.57°39'W., 36.84', scribed "C¼ S9 BT".
- A larch, 14" diam., bears N.19°47'W., 29.01', scribed "C¼ S9 BT".
- A lodgepole pine, 12" diam., bears N.32°28'E., 30.75', scribed "C¼ S9 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR
Date Filed 10/28/98
10/31/98
By R. ROBINSON DEPUTY
File No 156-1998R

AY