


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.09 Set a basalt rock, 15 x 14 x 8. 10 ins. in the ground for 1/4 sec. cor. marked 1/4 on the N. side, raised mound of rock alongside. Pits impracticable.

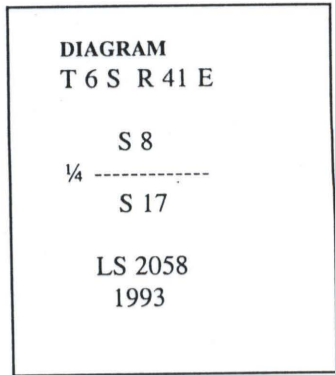

A Description of corner evidence found:

Found a stone 18" x 17" x 12" mkd. 1/4 on the Northerly face, in small mound of stone.

Description of monument and accessories I established to perpetuate the original location of this corner:

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Ronald E. Stoll 9/98*

OREGON  
JULY 15, 1923  
RONALD E. STOLL  
2058

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, with a 2' mound of stones to cap, buried found stone along south side of monument, from which:

- A rebar, 1/2" diam., bears N.80°51'E., 9.79', 2" above the ground with a small mound of stone.
- A rebar, 1/2" diam., bears N.21°51'E., 11.95', 2" above the ground with a small mound of stone.
- A rebar, 1/2" diam., bears S.63°58'W., 11.43', 2" above the ground with a small mound of stone.
- A rebar, 1/2" diam., bears S.09°31'E., 10.44', 2" above the ground with a small mound of stone.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS AND DISTANCES TAKEN TO THE CENTER OF REBAR. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_  
(COUNTY OFFICIAL) by \_\_\_\_\_ (DEPUTY)

BR

UNION COUNTY SURVEYOR
Date Received <u>10/28/98</u>
Date Filed <u>10/31/98</u>
By <u>R. Robinson, Deputy</u>
File No. <u>174-1998R</u>