


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.10 Set a basalt rock, 14 x 8 x 6, for 1/4 sec. cor. from which:

- A pine, 24 ins. diam., bears S.20°W., 15 lks. dist.
- A pine, 22 ins. diam., bears N.50°W., 48 lks. dist.

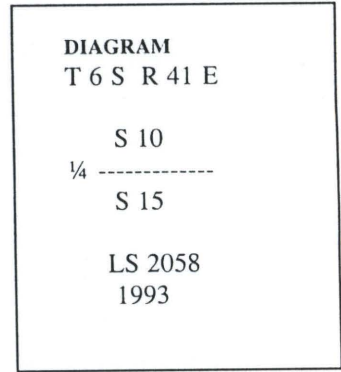

A Description of corner evidence found:

Found a 28" pine stump with visible blaze 1.6' long with an axe mark at bottom of blaze. No visible scribing, blaze has fire damage. Accepted a SW bearing tree and established corner position at record bearing and distance.

A stump, 28" diam., bears S.20°00'W., 9.9', blaze with no marks.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, from which:

- A pine, 14" diam., bears N.56°34'E., 34.16' scribed "1/4 S10 BT".
- A pine, 12" diam., bears S.61°33'E., 3.62' scribed "1/4 S15 BT".
- A pine, 8" diam., bears S.40°16'E., 14.92', scribed "1/4 S15 BT".
- A pine, 12" diam., bears N.65°48'W., 82.85', scribed "1/4 S10 BT".
- An iron tie, bears S.76°30'E., 3.4'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
 WITNESS TO MONUMENT: DAVID SUTHERLAND
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR

Date Received 10/28/98

Date Filed 10/31/98

By R. ROBINSON, DEPUTY

File No. 170-1998R County of _____

REGISTERED PROFESSIONAL LAND SURVEYOR

R. E. Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Office of _____ State of _____ I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ by _____ (COUNTY OFFICIAL) _____ (DEPUTY)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


J-15

History of original corner establishment:

SURVEYED BY: W.B. BAR, 1885, CONTRACT NO. 516

40.10 Set a basalt rock, 14 x 8 x 6, for 1/4 sec. cor. from which:

- A pine, 24 ins. diam., bears S.20°W., 15 lks. dist.
- A pine, 22 ins. diam., bears N.50°W., 48 lks. dist.

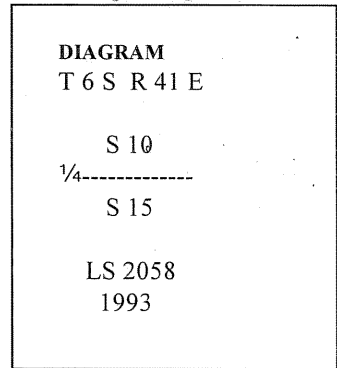

A Description of corner evidence found:

Found a 28" pine stump with visible blaze 1.6' long with an axe mark at bottom of blaze. No visible scribing, blaze has fire damage. Accepted a SW bearing tree and established the corner position at record bearing and distance.

A stump, 28" diam., bears S.20°00'W., 9.9', blaze with no marks.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, from which:

- A pine, 14" diam., bears N.56°34'E., 34.16', scribed "1/4 S10 BT".
- A pine, 12" diam., bears S.61°33'E., 3.62', scribed "1/4 S15 BT".
- A pine, 8" diam., bears S.40°16'W., 14.92', scribed "1/4 S15 BT".
- A pine, 12" diam., bears N.65°48'W., 82.85', scribed "1/4 S10 BT".
- A iron tie, bears S.76°30'E., 3.4'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
 WITNESS TO MONUMENT: DAVID SUTHERLAND
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
 BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY
SURVEYOR

Date Received 1/4/06

Date Filed 9/9/06

By R. ROBINSON DEPUTY

File No. 016-2006R

REGISTERED
PROFESSIONAL
LAND SURVEYOR

R. Stoll 6/04

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Office of _____ County of _____
 State of _____ I hereby certify that the within instrument was filed in this office
 for record on the ___ day of _____, 20 ____.

 (COUNTY OFFICIAL) By _____ (DEPUTY)