


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.00 Set stone 14 x 10 x 10 for 1/4 sec. cor.

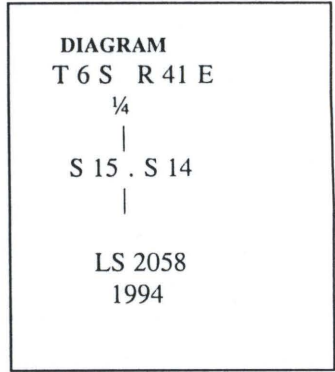

Description of corner evidence found:

No evidence of the original corner found.

Description of monument and accessories I established to perpetuate the original location of this corner:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald E. Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 26" in the ground, with 12" mound of stone to cap, from which:

- A pine, 9" diam., bears N.66°E., 8.30', scribed "1/4 S 14 BT".
- A double pine, 9" diam., bears S.6°16'W., 27.09', scribed "X BT".
- A pine, 13" diam., bears S.87°30'W., 19.91', scribed "1/4 S 15 BT".
- A pine, 12" diam., bears N.25°30'W., 30.55', scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR	
Date Received	<u>10/28/98</u>
Date Filed	<u>10/31/98</u>
By	<u>R. Robinson, Deputy</u>
File No.	<u>176-1998R</u>

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19__
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)