

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner established by John Stone, under GLO Contract No. 235, dated July 6, 1875. Surveyor General field notes state:

Set stone 16x6x6 for 1/4 Sec. Cor.

T 6 S R 41 E N-23

	S	24	

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a stone 16"x6"x6" marked '1/4'


SEE SURVEY NUMBER 029-2023

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position of the found stone, I set a 2 1/2"x30" aluminum pipe with 3" aluminum cap, marked as shown below, 26 inches in the ground, in a collar of stone 2 ft. diameter, from which:

NEW BEARING OBJECTS:

- A 5/8"x15" iron pin bears North 38°30' East, a distance of 21.58 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NE RP
- A 5/8"x15" iron pin bears South 45°10' East, a distance of 21.78 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SE RP
- A 5/8"x15" iron pin bears South 74°30' West, a distance of 21.46 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SW RP
- A 5/8"x15" iron pin bears North 45°30' West, a distance of 30.70 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NW RP.

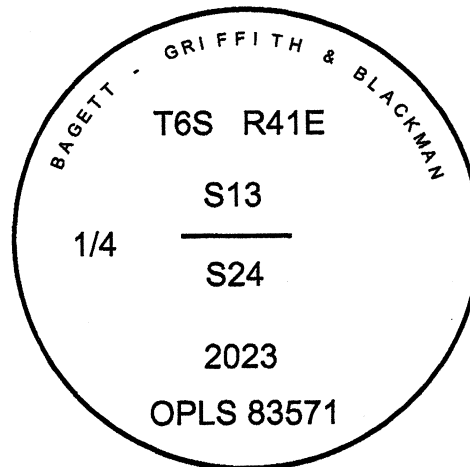

Buried stone along South side of monument.
Corner falls approx. 30 ft. South of an East/West running fence.
I hereby certify that the corner was monumented on November 11, 2023.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2025

I used a RTK GPS in the establishment of the accessories. Basis of Bearing is as per Survey Number 029-2023

UNION COUNTY
SURVEYOR

Date Received 11/16/23

Date Filed 11/16/23

Filed By *[Signature]*

File Number 058-2023R