


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner established by John Stone, under GLO Contract No. 235, dated July 6, 1875. Surveyor General field notes state:

Set stone 14x13x7 for 1/4 Sec. Cor. at foot of hill bears N70°W and S60°E

T 6 S R 41 E P-21



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a embedded stone mound, 3 1/2 ft. diameter, stones are well embedded and are of a large size not typical of stone in the area. Area is relatively devoid of stones. I find a stone of called size, but can find no definitive marks. Due to harmony with section corner to the South, as well as to the topographic call, I accept this as the original corner monument.


SEE SURVEY NUMBER 029-2023

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position of the stone mound, I set a 2 1/2" x 30" aluminum pipe with 3" aluminum cap, marked as shown below, 24 inches in the ground, in a collar of stone 3 ft. diameter, from which:


NEW BEARING OBJECTS:

- A 5/8"x15" iron pin bears North 71°30' East, a distance of 22.80 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NE RP
- A 5/8"x15" iron pin bears South 24°30' East, a distance of 13.45 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SE RP
- A 5/8"x15" iron pin bears South 76°45' West, a distance of 17.25 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SW RP
- A 5/8"x15" iron pin bears North 15°30' West, a distance of 17.34 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NW RP.

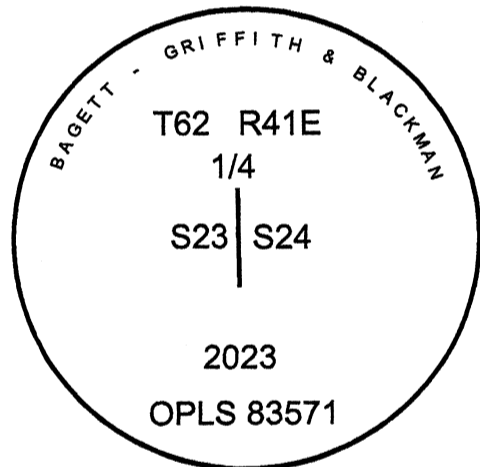

I hereby certify that the corner was monumented on November 11, 2023.

REGISTERED
PROFESSIONAL
LAND SURVEYOR




OREGON
June 2, 2010
JEFFREY S. HSU
83571

I used a RTK GPS in the establishment of the accessories. Basis of Bearing is as per Survey Number 029-2023

**UNION COUNTY
SURVEYOR**

Date Received 11/16/23

Date Filed 11/16/23

Filed By 

File Number 059-2023R