

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


R-21

History of original corner establishment:

Corner established by John H. Stone under GLO contract No. 235 dated July 6, 1875.

Surveyor's General records state:

Set stone 15 x 14 x 12 for Cor. to Secs. 23, 24, 25, and 26.

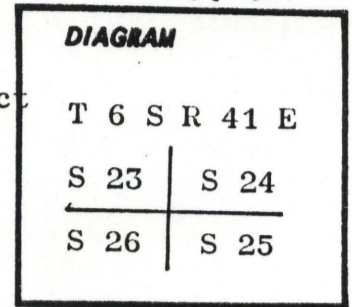


Description of corner evidence found:

Found a lava stone 18 x 12 x 9 ins. with 2 notches on the south edge and 1 notch on the east edge in a mound of stone.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2½ in. brass cap on a 1 in. iron pipe 31 ins. long and projecting 6 ins. out of the ground with a surrounding rock mound and buried the original stone alongside.

Brass cap marked thus: T 6 S R 41 E



ORLS 1639

No accessories were established for the brass cap monument.

I hereby certify that the above corner was properly re-established by me on March 21, 1980 and witnessed by John R. Mitchell.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William L. Hanley*

OREGON  
JULY 14, 1978  
WILLIAM L. HANLEY  
-1639

Office of County Surveyor..... County of..... Union.....  
State of..... Oregon.....

I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)


|                          |         |
|--------------------------|---------|
| UNION COUNTY<br>SURVEYOR |         |
| Date Received            | _____   |
| Date Filed               | _____   |
| By                       | _____   |
| File No.                 | 797-84R |

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Monument originally established by John H. Stone under GLO contract number 235 dated July 6th, 1875. Surveyor General field notes state:  
Set stone 15x14x12 ins. for cor. to secs. 23, 24, 25, and 26

T 6 S R 41 E R-21



In 1980 William L. Hanley remonuments the corner at found original stone position. Union County Monumentation record 797-84R states:

Found a lava stone 18x12x9 ins. with 2 notches on the South edge and 1 notch on the East edge in a mound of stone. Set a 2 1/2" brass cap on a 1" inch iron pipe, 31" long and projecting 6 ins. above the ground with a surrounding rock mound and buried the original stone alongside and marked the cap as shown. No accessories established for the brass cap monument.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 1" iron pipe with a 2 1/2" brass cap 4" above ground and in a 3' diam. collar of stone.


**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

From the iron pipe monument:

**NEW BEARING OBJECTS:**

- A 5/8" x 15" iron pin bears North 51°29' East, a dist. of 23.63 ft., with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR NE RP".
- A 5/8" x 15" iron pin bears South 59°20' East, a dist. of 17.70 ft., with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR SE RP".
- A 5/8" x 15" iron pin bears South 45°18' West, a dist. of 16.89 ft., with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR SW RP".
- A 5/8" x 15" iron pin bears North 56°43' West, a dist. of 18.05 ft., with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR NW RP".

I hereby certify that the corner was perpetuated on February 9, 2023.  
Witness: Kyle A. Tucker

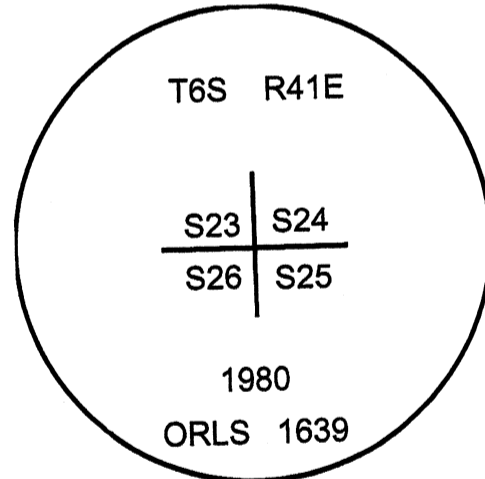

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*

OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2023

I used a Leica GS18 with RTK in the establishment of the new accessories. Basis of Bearing is as per Survey Number 035-2012. Bearings and distances are to the center of the brass and aluminum caps.

**UNION COUNTY  
SURVEYOR**

Date Received 2/14/23

Date Filed 2/14/23

Filed By *[Signature]*

File Number 002-2023R

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2023002

SECTION CORNER COMMON TO SECTIONS 23, 24, 25, and 26

TWP. 6 S RGE. 41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: February 9, 2023

LAT: 45 ° 1 ' 19.15330 " N

SURVEYOR: JEFFREY S. HSU  
OPLS 83571

LONG: 117 ° 38 ' 44.00198 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 507146.948 INT FT.

E: 8939986.852 INT FT.

TYPE: GPS

THETA: 2 ° 1 ' 27.6 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999897848

ELEV: 3556.01 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

1" Iron pipe with brass cap marked as shown

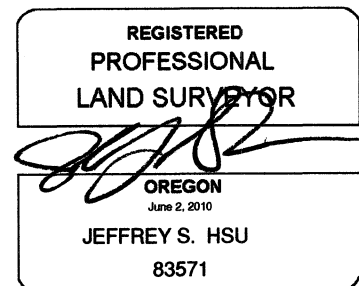

Renewal Date: June 30, 2023

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

GEOID MODEL : 2012B