

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by John H. Stone, US Deputy Surveyor, during the original survey Contract No. 235 dated July, 1875. Set stone 14x13x10 for 1/4 sec cor

DIAGRAM

T6S R41E

S25
1/4—
S36

1994
PLS 699

Description of corner evidence found:

Found a stone 12x13x10 firmly set in the ground in a mound of stone with /4 chiseled on the north face. The top of the stone had broken off. No bearing trees were previously established.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a Union County Surveyor 2"x30" aluminum pipe with a 2 1/2" aluminum cap, marked as shown in the diagram, 26" in the ground, replacing the rock which is turned upside down and buried on the north side of the monument. Improved the mound of rock to be 24" in diameter by 4" high around the monument, from which new Accessories are:

- No bearing trees set because no trees are available.
- A No. 5 rebar 24" long with a 2" aluminum cap marked RM 9.6' ↖, 1994, PLS 699, set 24" in the ground with the cap flush with the ground surface bears S35°E, 9.6 feet.
- A No. 5 rebar 24" long with a 2" aluminum cap marked RM 7.7' ↙, 1994, PLS 699, set 24" in the ground with the cap flush with the ground surface bears N56°E, 7.7 feet.
- A blue colored DEEP (a magnetic underground marker) which is set 16" in the ground and bears N35°W, 2.9 feet.
- An orange colored DEEP (a magnetic underground marker) which is set 16" in the ground and bears S56°W, 3.1 feet.

UNION COUNTY SURVEYOR
Date Received <u>5/5/94</u>
Date Filed <u>5/17/94</u>
By <u>Gregory T. Blackman</u>
File No. <u>018-1994R</u>

I, Leland L. Myers, 587 E. Auburn St., P.O. Box 98, Sumpter, OR 97877, do hereby certify that on May 2, 1994, I monumented the corner as herein described.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Leland L. Myers

OREGON
JULY 9, 1965
LELAND LEE MYERS
699

FILED

IN THE OFFICE OF THE Union COUNTY SURVEYOR
THIS ____ DAY OF _____, 19__

Union County Surveyor

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2023004

QUARTER CORNER COMMON TO SECTIONS 25 AND 26

TWP. 6 S RGE. 41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: February 9, 2023

LAT: 45 ° 0 ' 26.95127 " N

SURVEYOR: JEFFREY S. HSU
OPLS 83571

LONG: 117 ° 38 ' 7.23199 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 501957.262 INT FT.

E: 8942813.490 INT FT.

TYPE: GPS

THETA: 2 ° 1 ' 53.7 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999898525

ELEV: 3432.75 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" Aluminum pipe with 2 1/2" aluminum cap
marked as shown in fence corner

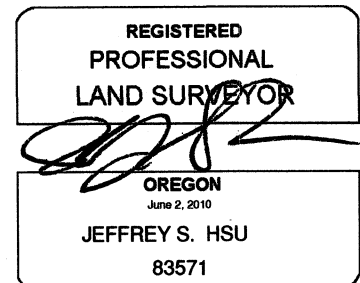

Renewal Date: June 30, 2023

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

GEOID MODEL : 2012B