

A-1
 T 6 S
 R 42 E
 NW OF SECT. 6

Form 874-9—Revised May, 1918

U. S. Department of Agriculture
 FOREST SERVICE

Whitman NATIONAL FOREST
 CORNERS OF THE PUBLIC SURVEY

T 546 S R 42 E W. Mer.
Township Corner common to Sections
36, 37, 6, and 1

Corner consists of a L. P. tree 7 in DBH (not) in place
 State condition Tree alive.

Dimensions above ground 45 Feet inches
 Sketch grooves, letters, figures, or notches, on proper face or edge.

CARDINAL POSITION				DIAGONAL POSITION			
North	West	South	East	NW	SW	SE	NE

Mound of _____ is located _____

Pits are located _____

Sketch markings of Bearing Trees (or Rocks) in proper box and fill blanks below, giving bearings from Corner to Trees and Distances in Links.

<u>T 5 S</u>			
<u>R 42 E</u>			
<u>Sec. 1</u>			
<u>B. T.</u>			

Species W. L.
 Diameter 1 in.
 Bearing South
 Distance 45 Ft.

Do you believe this to be a genuine Land Office Corner? yes
 If not, why? _____

E. J. Wilmoth
 (Signature)
3-14-34 Forest Ranger.
 (Date) (Title)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed 12-23-87

By S. LANGLITZ, DEPUTY

File No. 387-87R


A-1

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

11.645 From this point, the original closing cor. of tps. 6 S., Rs. 41 and 42 E., bears South, 0.280 chs. dist., determined at the record bearing and distance from the remains of an original bearing tree:



A rotten Douglas fir stump, 25 ins. diam., bears S.60°W., 23 lks. dist., with scribe marks S2 BT on pitched, detached blaze. Marks on bearing tree coincide with the erroneous description given in the original notes and tree is accepted as the SW. bearing tree.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap, from which:

- A larch, 10 ins. diam., bears S.59°E., 21 lks. dist. mkd. T6S R42E S6 CC BT.
- A lodgepole pine, 8 ins. diam., bears S.37°W., 21 lks. dist. mkd. T6S R41E S1 CC BT.

Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, 6 " above the ground, from which:

- A fir, 9" diam., bears S.58°05'E., 13.86', with a 19" x 3" blaze, scribed "T6S R42E S6 CC BT".
- A pine, 8" diam., bears S.36°05'W., 14.09', with a 24" x 3" blaze, scribed "T6S R41E S1CC BT".

Description of monument and accessories I established to perpetuate the original location of this corner:

- A fir, 6" diam., bears N.55°47'W., 3.61', with a 6" x 3" blaze, scribed "BT".
- A pine, 11" diam., bears N.47°48'E., 27.44', with a 6" x 3" blaze, scribed "X" at breast height and "BT" at base.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
 WITNESS TO MONUMENT: DAVID SUTHERLAND
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.


WAGON COUNTY REGISTERED	
Date Received	10/28/98
Date Filed	10/31/98
By	R. ROBINSON, DEPUTY
File No.	County of 092-1998R

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>M & Stoll 9/98</i>
OREGON JULY 16, 1903 RONALD E. STOLL 2058

Office of _____
 State of _____ I hereby certify that the within instrument was filed in this office
 for record on the ____ day of _____, 19____
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

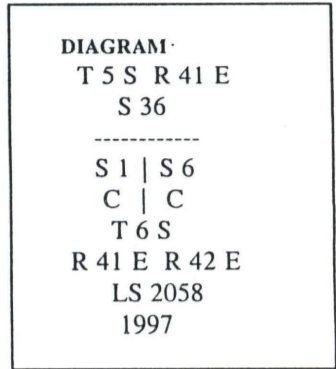

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped monument, cap marked per diagram, 6" in the ground, with a large mound of stone to cap, from which:

Existing Accessories:

- A tamarack, 9" in diam., bears S.25°50'E., 27.9', with partial visible scribing
- A fir, 7" in diam., bears S.15°20'W., 30.4', scribed "T6SR41ES1CC BT"
- A fir, 11" in diam., bears N.86°40'E., 20.1', scribed "XBT"

New Accessory:

A tamarack, 10" in diam., bears N.75°30'W., 1.6', scribed "XBT"

A 3" BLM brass capped pipe, marked CC, 6 " above the ground bears S 00°49'40" E, 17.97'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: ERIC GREEN
BEARINGS AND DISTANCES TAKEN TO THE CENTER OF CAP.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

WILSON COUNTY
REGISTERED

Date Received 10/28/98
Date Filed 10/31/98
By R. ROBINSON, DEPUTY
File No 180-1998R

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald E. Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the _____ day of _____, 19____

_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of the South Boundary
(First Standard Parallel South),
T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS	
11.645	<p>From this point, the original closing cor. of Tps. 6 S., Rs. 41 and 42 E., bears South, 0.280 chs. dist., determined at record bearing and distance from the remains of an original bearing tree:</p> <p>A rotten Douglas fir stump, 25 ins. diam., bears S. 60° W., 23 lks. dist., with scribe marks S2 BT on pitched, detached blaze. Marks on bearing tree coincide with the erroneous description given in the original notes and tree is accepted as the SW. bearing tree.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 5 S R 41 E</p> <p>S 36</p> <p>S 1 S 6</p> <p>R 41 E R 42 E</p> <p>T 6 S</p> <p>C C</p> <p>1991</p> </div> <p>from which new bearing trees</p> <p>A larch, 10 ins. diam., bears S. 59° E., 21 lks. dist., mkd. T6S R42E S6 CC BT.</p> <p>A lodgepole pine, 8 ins. diam., bears S. 37° W., 21 lks. dist., mkd. T6S R41E S1 CC BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p>
35.25	Ascend gradually over NE. slope.
39.650	Broad spur, slopes N.; desc. W. slope.
	<p>Point for the standard ¼ sec. cor. of sec. 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC</p> <p>T 5 S R 41 E</p> <p>¼ S 36</p> <p>1991</p> </div> <p>from which</p> <p>A larch, 10 ins. diam., bears N. 88½° E., 20 lks. dist., mkd. ¼ S36 SC BT.</p> <p>A ponderosa pine, 14 ins. diam., bears N. 60½° W., 37 lks. dist., mkd. ¼ S36 SC BT.</p> <p>Deposit a white "DEEP-1" magnetic marker at the base of the stainless steel post.</p>

UNION COUNTY
SURVEYOR

Date Received 3/5/13

Date Filed 3/5/13

By [Signature]

File No. 188-2013R