

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

SURVEYED BY: J. STONE, 1875, CONTRACT NO. 235

80.00 Set a Fir post 4 feet long 4 ins. in diameter as per instructions for corner to sections 1 and 12, 6 and 7

A pine 12 ins. in diameter bears South 40° West 35 links distance


A pine 8 ins. in diameter bears North 45° West 80 links distance

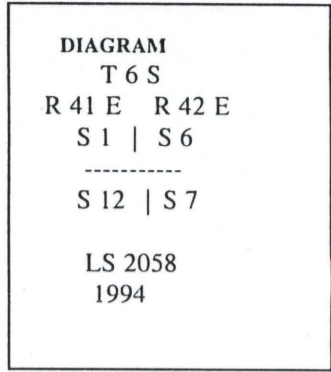

Description of corner evidence found:

No evidence of original monument found.

Description of monument and accessories I established to perpetuate the original location of this corner:

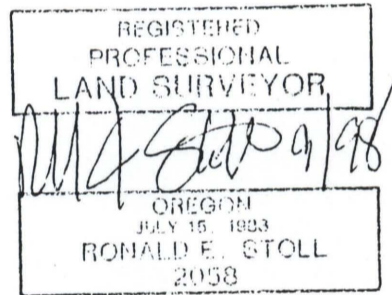

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 22" in the ground, with a mound of stone to cap, from which:

- A fir, 8" in diam., bears S.11°01'E., 24.31', scribed "T6SR41ES7BT".
- A pine, 12" in diam., bears S.61°42'W., 21.14', scribed "T6SR41ES12BT".
- A fir, 30" in diam., bears N.22°37'W., 24.64', scribed "T6SR42ES1BT".
- A fir, 18" in diam., bears N.76°12'E., 32.35', scribed "T6SR42ES6BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____

(COUNTY OFFICIAL) by _____ (DEPUTY)

UNION COUNTY
RECORDS
Date Received 10/28/98
Date Filed 10/31/98
by R. ROBINSON, DEPUTY
File No. 126-1998C

T