


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: J. STONE, 1875, CONTRACT NO. 235

40.00 Set a post with mound and trench as per instructions for 1/4 Sec corner.(no BT's)

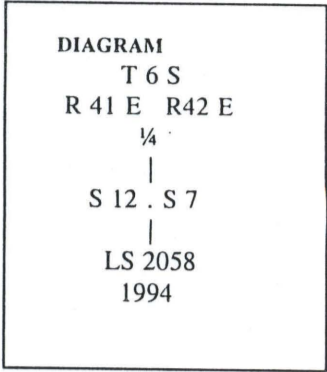

Description of corner evidence found:

No evidence of original monument found.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald E. Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 28" in the ground, with no stones, from which:

- A fir, 8" in diam., bears S.55°34'W., 46.84', scribed "XBT".
- A pine, 9" in diam., bears N.73°43'W., 77.25', scribed "1/4S12BT".
- A fir, 8" in diam., bears N.34°04'W., 41.33', scribed "XBT".
- A fir, 10" in diam., bears N47°27'E., 25.78', scribed "1/4S7BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

AR

CLATSOP COUNTY REGISTERED
Date Received <u>10/28/98</u>
Date Filed <u>10/31/98</u>
by <u>R. ROBINSON, DEPUTY</u>
FILE NO. <u>1994-1970 R</u>