


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-3

History of original corner establishment:

Corner was originally established by W.B. BARR, U.S. Deputy Surveyor, under Contract No. 443, dated May 29, 1882. Surveyor General records state: Set a basalt rock 14"X 14"X 5", 10 inches in the ground. Stone was marked with a 1/4 on the North face with a raised mound of stone alongside.

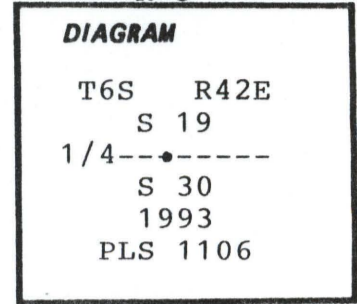

See Survey 052-1994

Description of corner evidence found:

Found a stone 14"X 14"X 4" with faint chisel marks near a scattered stone mound on a steep W. slope just below a rock bluff.

Description of monument and accessories I established to perpetuate the original location of this corner:

At postion of the found stone:

Set a 2 1/2" X 30" aluminum pipe with a 2 1/2" aluminum cap, 26" in ground and surrounded with a mound of earth and stone. Deposited stone in hole along side of monument.
Attached sign 54-9 & 54-2 to steel fence post, set 3.0 feet West of monument.

New bearing objects established:

- A rock outcropping 5' X 7' marked "X BO"- 3 feet above ground, bears S 88 1/2° E - 33.8 feet.
- A rock outcropping 8' X 10' with a W. flat face marked "X BO", 3.5' above ground bears S 35 1/2° E - 106.7 feet.
- A 5/8" X 30" rebar with a yellow cap stamped "WR Wells PLS 1106" bears S 13 1/2° W - 18.4 feet.
- A 5/8" X 30" rebar with a 1 1/2" aluminum cap stamped "RM 1/4S19 1106" bears N 35 1/2° W - 20.0 feet.

I hereby certify that the above corner monument was properly monumented to U.S.F.S standards by me on December 9, 1993.

Compass declination 18° East.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of.....
 (COUNTY OFFICIAL) (DEPUTY)

renews 12-31-94

**UNION COUNTY
SURVEYOR**

Date Received 11/13/84
 Date Filed 11/14/84
 By Guy T. Clark
 File No 163-1994K