


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-09

History of original corner establishment:

Original corner established in 1883 by William B. Barr under contract #492. Set a basalt stone, 12"x10"x5", 8" in ground. From which:

- A 12" Pine bears N10°E, 103 lks.
- A 12" Spruce bears S70°E, 20 lks.
- An 8" Pine bears S75°W, 70 lks.
- A 12" Pine bears N80°W, 72 lks.

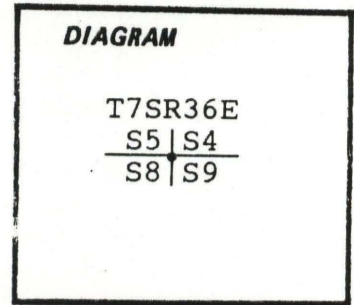

Description of corner evidence found:

- Found original stone, 12"x10"x5" with 4 grooves on South and 3 grooves on East faces, firm in place.
- Found the following original bearing trees:
- A 15" dead standing Lodgepole Pine with burned out blazes (faint scribing visible) bears N14°E, 103 lks. (orig. N10°E).
 - A decayed, partially burned stump with slab sticking up in the middle, 'S9' visible, bears S66½°E, 20 lks., (orig. S70°E)
 - A 12" dead standing Lodgepole Pine, open blaze, full scribing visible bears S76½°W, 45.2 ft. (Orig. S75°W, 70 lks.)
 - A stump hole bears N82°W, 72 Lks., (orig. N80°W)

Description of monument and accessories established to perpetuate the original location of this corner:

At the position of the original stone, I set a 2½"x30" aluminum capped aluminum pipe rising 10" in a mound of stones with original stone along N. side. I set a steel fence post 3' North of corner

Cap is stamped:
T7S R36E
 $\frac{S5 | S4}{S8 | S9}$
RLS1848
1987
 $\frac{N45^\circ E \ S8}{30.00' RM}$
RLS1848 1987
 $\frac{S5 \ S45^\circ E}{RM \ 30.00'}$
RLS1848 1987

New BT's and RM's:

- A 5/8"x36" iron rod with a 1½" aluminum cap marked: bears S45°W, 30.00 ft., steel fence post alongside
- A 27½" Spruce bears N84½°E, 191.4 ft., blazed&scribed: T7SR36ES4BT
- A 5/8"x36" iron rod with a 1½" aluminum cap marked: bears N45°W, 30.00 ft., steel fence post alongside
- A 4½" Alpine Fir bears S81¼°E, 149.6 ft., blazed and scribed; 'X' BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes. From North end of Rd. 5185110, go east 350 ft. to corner. Corner is 200 ft. West of a 10 acre meadow, 25 ft. North of a small draw flowing NE'ly. Corner is in 1986 Clear Burn.

Compass declination: 20½°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on June 27, 1987.

REGISTERED PROFESSIONAL LAND SURVEYOR



OREGON
JULY 13, 1979
B. A. SUTTON
1848

UNION COUNTY SURVEYOR

Date Received 8-19-87

Date Filed 8-24-87

By G. LANGLITZ, DEPUTY

File No. 97-87 R

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL) (DEPUTY)