


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX: J 21

History of original corner establishment:

- A. Corner established by US Deputy Surveyor Frank W. Campbell working under contract numbered 498, dated March 10, 1884.

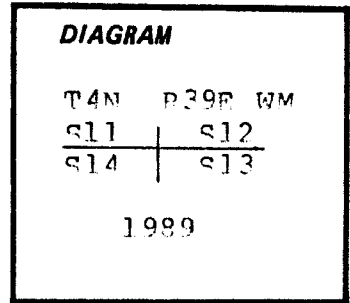

Surveyor General's Record states:

Set a basalt stone 18x18x15 ins
 12 ins in ground for cor to secs
 11,12,13 & 14 marked with 4 notches on S & 1 notch on E edges;
 from which
 A pine 12 ins dia brs N30E 35 lks dist marked T4N R39E S12 BT
 A pine 18 ins dia brs S20E 55 lks dist marked T4N R39E S13 BT
 A fir 20 ins dia brs S25W 47 lks dist marked T4N R39E S14 BT
 A pine 30 ins dia brs N50W 56 lks dist marked T4N R39E S11 BT

Description of corner evidence found:

- B. MONUMENT FOUND:


Found stone 15x15x18 inch loose on surface with no visible marks at locus

ACCESSORIES FOUND:

Found 24 in dia ponderosa pine bears S20E at 36.3 feet with visible scribing of "4NR39ES13"
 Found 31 in dia ponderosa pine bears N50W at 37.0 feet with visible scribing of " 9 "
 Found fir root collar in SW quadrant with deteriorated bole at record bearing and distance.

Description of monument and accessories established to perpetuate the original location of this corner:

- C. I set a 2.5 inch dia. by 30 inch long aluminum monument 21 inches in the ground with the found stone alongside the monument on surface. As found evidence agrees with GLO record I set the monument at locus of found stone and distance measurements from original bearing trees. I mark the cap:



STRYKER PLS 2060

NEW ACCESSORIES ESTABLISHED with magnetic declination of 20 deg. East

14" douglas fir bears S20W at 30.5 ft scribed "T4N R39E S14 BT"
 12" ponderosa pine bears N51E at 34.7 ft scribed "T4N R39E S12 BT"

Painted red band around each bearing tree
 Placed brass washer with "PLS 2060" at base of each new BT blaze
 Placed USDA Forest Service metal signs 54-3 (BT) and 54-9 (LSM) on each bearing tree. Placed 54-9 (LSM) sign on steel fence post 3 feet east of corner.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of..... 19.....

..... by
 (COUNTY OFFICIAL)

UNION COUNTY SURVEYOR	
Date Received	<u>10-2-89</u>
Date Filed	<u>10-11-89</u>
By	<u>G. LANGLITZ</u>
File No.	<u>192-89R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>Edwin A. Stryker</i>
OREGON JULY 15, 1933 EDWIN A. STRYKER 2060