


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

For complete history see survey by Andrew Blachly for Oregon State Parks & recreation Department filed as Survey Number 026-1992 and filed in the office of the Union County Surveyor. Discourse is too long for this space allowed. This sheet is intended to describe the new accessories for the corner, and is transcribed by the Union County Surveyor for the Book of Bearing Trees.

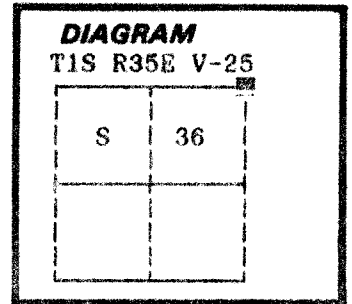

Description of corner evidence found:

Found 3/16" x 4" iron Plate, Found a 4"x4" white wood post N 45° W 1 foot. Oregon State
Found 7" Fir bears S 50° E 24 Lks, stump hole remains
A 4" Fir bears N 42° W, 25 lks, stump hole remains.
A 17" fir bears S 23° W 44.9 ft. Single partially healed blaze, scribes visible.
A 12" Tamarack bears N 52° W 12.4 feet, dead with forest service tag and forestry tag attached.
An 18" Fir bears n 39° W 76 feet, single partially healed blaze scribes visible.

SEE SURVEY NUMBER 026-1992 FILED IN THE UNION COUNTY SURVEYORS OFFICE.

Description of monument and accessories I established to perpetuate the

original location of this corner: At the position determined by survey, I set a 2½ Diameter brass cap on a 1½ " x 30 " Gal. Pipe 0.7 above ground from which:

New Accessories: NONE

I hereby certify that the above corner point was perpetuated as hereon described on January 4, 1990.

Witnesses: Billy J.W. Hermann, Harold Hanson. & S. Dejanakul Set
By Andrew Blachly

+
3/16" x 4" Iron
Plate

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination.

UNION COUNTY SURVEYOR
Date Received <u>7-1-92</u>
Filed <u>7/21/92</u>
By <u>Andrew T. Blachly</u>
File No. <u>046-1992R</u>

V-25