


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

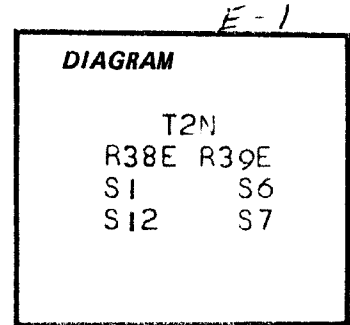

WOODEN POST

- 36" FIR N60E 51LKS
- 10" FIR N73W 32LKS.
- 12" FIR S38W 25LKS.
- 8" FIR S44E 26LKS.

Description of corner evidence found:

- RED PAINTED STONE IN MOUND OF STONES
- 48" FIR SNAG N60E 33.7' SCRIBING VISIBLE
- 14" FIR N73W 21.1' GREEN TREE, SCRIBING VISIBLE
- 24" FIR SNAG S38W 16.5' SCRIBING VISIBLE
- 10" ROTTEN STUMP S44E 17.2'

Description of monument and accessories I established to perpetuate the original location of this corner:


SET 2"x30" IRON PIPE WITH BRASS-CAP MARKED:

T2N
R38E R39E
S1 S6
S12 S7
1978
RLS 346

- 8" FIR S72W 26.2' MKD. T2N R38E S12 BT
- 10" FIR S09E 23.4' MKD. T2N R39E S7 BT
- 6" FIR N34E 59.7' MKD. T2N R39E S1 BT

ALL BT'S HAVE A RED PAINTED STRIPE AND BT SIGNS. THE NEW BT'S HAVE A BRASS WASHER STAMPED RLS 346 NAILED TO THE LOWER FACE. THERE IS A 6' STEEL FENCE POST WITHIN 5' OF THE CORNER.

THERE IS A RED PAINTED AND BLAZED LINE RUNNING THROUGH THE CORNER.

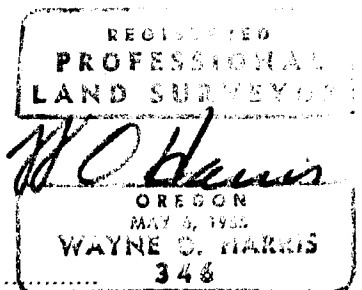

Office of... COUNTY... SURVEYOR..... County of UNION.....
 State of OREGON....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 261-83R