

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 382, dated September 30, 1884, executed by Herman Gradon. Surveyor General field notes state:

Set post for 1/4 sec. cor. from which:

A fir 10" in diam bears N 3° W 23 lks dist
A fir 7" in diam bears S 71° E 8 lks dist

In survey for Road Petition 580 (Thompson Road) Arthur Curtis notes an stake as an angle point in the road being coincident with the quarter corner.

In Survey Number 34-77, Ronald Brazeau sets three reference points to the corner position.

T 3 N R 40 E X-17

S	34

DESCRIPTION OF CORNER EVIDENCE FOUND:

No remains of original corner evidence or reference points by Brazeau. Thompson Road runs North/South through this corner. A prominent fence corner to fences running West and South falls along the West side of the road.

SEE SURVEY NUMBER CS 2025-019(Wallowa Co)/SURVEY NUMBER 022-2025(Union Co)

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At the intersection of the Easterly extension of a fence line, and the centerline of a North/South running road, I set a 5/8" x 30" iron pin with a 2 1/2" aluminum cap, marked as shown below, 34" in the ground, from which:

NEW BEARING OBJECTS:

An 8" Western Larch bears North 69° East, a distance of 41.65 feet, marked 1/4 S35 BT


A 9" Douglas Fir bears South 28° East, a distance of 47.70 feet, marked 1/4 S35 BT

A 12" Douglas Fir bears South 40° West, a distance of 55.65 feet, marked 1/4 S34 BT

A 8" Douglas Fir bears North 71° West, a distance of 30.25 feet, marked 1/4 S34 BT

I hereby certify that the corner was monumented on June 18th, 2025

Witness: Kyle Tucker, Adam Gordon

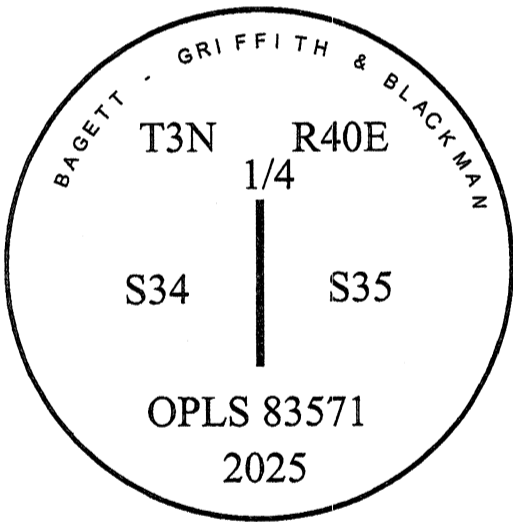

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2027

I used a tape and compass in the establishment of the new bearing trees. 14° East was used for declination. Bearings measures to a brass washer marks OPLS 83571 in the BT blaze. Distance measured to a 60d spike in the side of the tree.

UNION COUNTY
SURVEYOR

Date Received 6/26/25

Date Filed 6/26/25

Filed by [Signature]

File Number 022-2025R