


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 355, dated June 14, 1880. Surveyor General record states:

Set stake 4 ft long 4 in diam 18 in ground for 1/4 sec corner from which;

A fir 10 in diam bears W 24 lks dist
A fir 24 in diam bears N44°E 27 lks dist



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument or accessories. To the best of my knowledge, there has never been a fir tree within 400 feet of the proportioned position of this corner.

UNION COUNTY SURVEYOR	
Date Received	<u>11-7-91</u>
Date Filed	<u>11-7-91</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>028-1991R</u>

Description of monument and accessories I established to perpetuate the original location of this corner:

At the position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground, from which:

New Bearing Objects;

- A 5/8"x30" iron pin with plastic cap marked BGA SURVEY MARKER bears N36°E, 13.13 feet
- A 1/2"x30" iron pin with plastic cap marked BGA MARKER bears S31°E, a distance of 10.33 feet
- A 5/8" O.D. x30" steel pipe with plastic cap marked BGA SURVEY MARKER bears S70°W, 16.09 feet
- A 3/4"x30" iron pin with plastic cap marked BGA SURVEY MARKER bears N48°W, 22.08 feet


Raised a mound of stone around monument, 4 ft. base to top of cap.

Attached Bearing Tree Signs to the bearing objects.

Set a steel fencepost approximately 5 feet North with Property Boundary and Land Survey Monument signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 13, 1991.

Witnesses: Rick Robinson, Jim Bennett and John Osterman

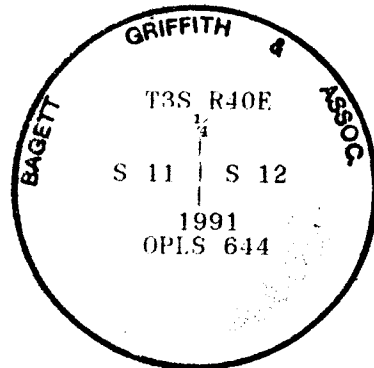

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)